




304 Smokey Lane North Little Rock, Arkansas 72117 Phone: (501) 945-0354 FAX: (501) 945-0370

HELIX POWER TOWER PLUS Installation Instructions

(2003-2008 Ram 5.7L HEMI w/Aftermarket Air Intake Part #57044)

Important! Read all instructions before you begin installation.

1. Loosen and remove aftermarket air inlet tube from the throttle body. Unplug the Throttle Air Control (TAC) harness plug from throttle body.
2. Loosen and remove four throttle body bolts. Remove throttle body.
3. Install the HELIX POWER TOWER PLUS throttle body spacer (57045 engraving side faces out), gasket and throttle body onto intake manifold. Using the washers and longer bolts, secure the throttle body to intake manifold. Tighten the bolts to 10 Nm (89 lb/in).
4. Reconnect TAC harness connector. Reinstall the aftermarket air inlet tube to throttle body. You may have to trim the air inlet tube to accommodate the spacing difference.

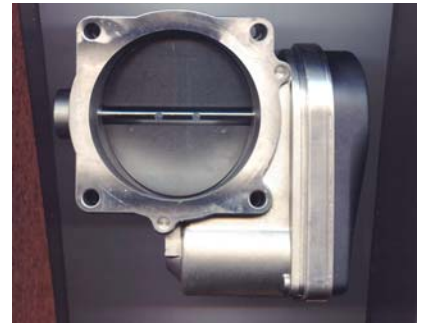

Parts List

- 1 Helix Power Tower Plus
- 1 Gasket
- 4 6mmx90mm bolts
- 4 6mm lock washers